



# **ALLEN DATAGRAPH**

## Technical Support Bulletin: Skew Adjustment DFS

Last Updated April 16, 2004

This TSB is written to help users adjust the loading of the media to correct for minor skew errors without using more than one target. This procedure assumes tracking is working correctly.

Load a job into the DFS. Move the Web Guides (1 and 2) away from the media about 1/2 inch (1 cm). Raise the pinch wheels. Align the start of each label with the cut strip by rotating the media (see steps/photo below). Do not change the distance of the media to the gear side of the machine. Lower pinch wheels. Then move the guides back within 1/32 inch (0.8 mm) of touching the media.

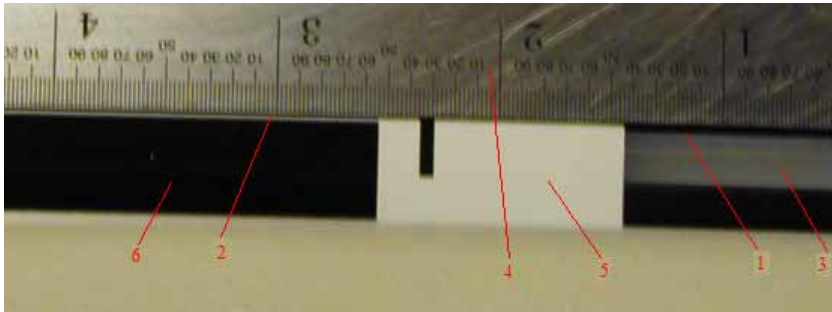

1. Lay ruler across media. Align edge of ruler with cut strip at each end.
2. Align start of label with ruler.
3. Cut strip
4. Ruler
5. Media
6. Label